



Series 725 Programmable Alarm Annunciator

Multi-redundant design for greater reliability

Modular construction from 1 to 256 alarm channels

Multi-redundant design so there is no single point of failure

Choice of window sizes

Available in six colors with conventional filament lamps or removable LED assemblies

Each channel programmable from the front

Low cost RS485 bi-directional Communications option

Panel or 19" rack mounting or fully integrated into wall mounting or floor standing enclosures

The Series 725 Alarm Annunciator provides the ideal solution to all your alarm system requirements. Whatever the size or complexity of your alarm scheme the Series 725 can be configured to provide the best solution. With a field proven multi-redundant ASIC design this Annunciator gives the best in reliability, flexibility and programmability for all applications and industries.

With a range of three window sizes, six colors and a choice of bulb or ultra-bright LED illumination, a format and size will be available to match your exact requirements. Each individual alarm way is fully programmable from the front, using the integral programming module. This allows the user to select many different features giving thousands of possible combinations.

Numerous relay outputs are included as standard to connect to external equipment and individual repeat relays or communications can be supplied as an option.



Features & Benefits

Modular Construction

The modular design of the 725 Series allows units to be assembled in almost any size and shape to suit the individual customer's requirements. Units can be constructed from a single alarm channel to a maximum of 256 channels with a choice of three window sizes.

ASIC Technology

The Series 725 Annunciator builds on the success of previous designs using ASIC technology but taking the design to new levels of reliability.

Multi-Redundant Design

As Annunciators are often used to monitor critical plant alarms it is essential the unit provides the highest reliability possible. With this design there is no common CPU or common services module, which can cause complete system failure. All alarm cards in the Series 725 can act as the master controller, if a card does fail then only two alarm points are affected. This design combined with the huge reduction in component count gives a far higher Mean Time Between Failures.



Fully Field Programmable

The user may select from a vast range of different operating functions and alarm sequences including all the standard sequences defined in the ISA publication 'Alarm Sequences and Specifications S18.1 1979(R1985)'. The modular design of the 725 Series allows units to be assembled in almost any size to suit the customer's exact requirements. Units can be constructed from a single alarm channel to a maximum of 256 channels with a choice of three window sizes. All programmed information is stored in EEPROM giving repeatability, total reliability and requiring no battery backup.

Service From The Front

All normal servicing and maintenance is carried out from the front of the unit without the need for special tools. This includes bulb/LED removal, legend changes and all programming. When commissioning the unit it is a simple matter to check and amend all programmed settings from the front of the unit without removing power, boards, backplates or alarm bezels.

This programming module can also be used as a diagnostic tool to indicate the current state of the associated field contacts.

Pushbutton/Programming Module

As standard the bottom right cell is fitted with an integral pushbutton and audible module. This provides six pushbuttons and a 90dB audible together with a 'power on' LED. The rubber keypad is designed for harsh environments with an effective tactile feel to aid operators. It is this keypad that is dropped down to become the programming module when configuring the system.

Shallow Depth

Even with the advanced programming facilities the unit is still only 5.7" (145mm) deep, a fraction of the depth of traditional annunciator systems.

Pre-configured

If specified at the time of ordering, systems can be supplied pre-configured and complete with the associated colored filters and film legends, ready to install and commission.

Auto-mute and Auto-acknowledge

It is a frequent requirement of alarm systems to have an automatic mute or even automatic acknowledge after a certain time delay. This is another programmable feature supplied as standard on all units.



Expandability

Each Annunciator can be expanded using a factory supplied ribbon cable to link to additional units. Systems consisting of multiple Annunciators can be daisy chained together to form larger systems with common features. All first-up information, synchronized flash rates and pushbutton functions are linked through this ribbon cable.

Sleep Mode

Increasingly Alarm Annunciators are used in applications where the primary supply is produced from batteries, typically substations, which are not permanently manned. To conserve power in these situations the Annunciator can be placed in "Sleep" mode. In this mode the Annunciator works as normal, latching in alarms and driving repeat relays, but the drive to the lamps, horn and pushbutton inputs are disabled.

When the unit is removed from "Sleep" mode all alarm information is available in the normal way.

Serial Communication

Bi-directional RS485 communication is available as a low-cost option. This can be used to receive alarm information from or transmit to third party equipment. Each alarm channel can be configured to accept alarm inputs from the standard alarm contact or via the communications. The communications can be used to create systems linking two or more Annunciators together as repeat or grouped displays.

Features & Benefits

Inputs & outputs

Inputs

All inputs are opto-coupled and comply to the stringent requirements of the European Directive on electromagnetic compatibility and the low voltage directive. This ensures there is no possibility of false alarms. The standard input voltage is 24V but units can be supplied with field contact voltages of 48, 125 or 250V. All versions are capable of accepting AC or DC voltages.

Common Outputs

As standard the Series 725 has five relay outputs to cover all normal alarm applications. These are as follows:

- 1 Critical Audible Relay
- 2 Non-critical Audible Relay
- 3 Critical Group Relay
- 4 Non-critical Group Relay
- 5 Special Function Relay

Each of the group relays can have a reflash facility to indicate the occurrence of a new alarm within the group. The Special Function Relay can be set to act in a number of different ways to suit the particular application. This function can be selected from one of the following:

- ▶ Total Group Relay
- ▶ Ringback Audible Relay
- ▶ First-Up Relay
- ▶ Watchdog Relay

Audible Outputs

The standard unit will be supplied with an integral 90dB(A) audible and two audible relays (critical and non-critical). Each alarm channel can be programmed to be in one, both or neither of these two groups. The integral audible will always sound on the critical group.

Group Outputs With Reflash Facility


Two group relays are provided as standard (critical and non-critical). As with the audible relays, each alarm channel can be programmed to be in one, both or neither group. Each group relay can also be set to have a reflash facility. This means the first alarm in the group will change the state of the relay and any subsequent alarms within the same group will cause the relay to pulse for approximately 0.5 seconds.

Auxiliary Relays

Each alarm channel can be supplied with an individual repeat relay. Each relay can be programmed to be energised or de-energised on alarm and both normally open and normally closed contacts are available on customer terminals. The repeat relays can be set to follow the alarm logic, follow the field contact or follow the display.

Connections

All connections are made to the rear of the unit, using two part screw terminals capable of taking 12 AWG (2.5mm²) wire.

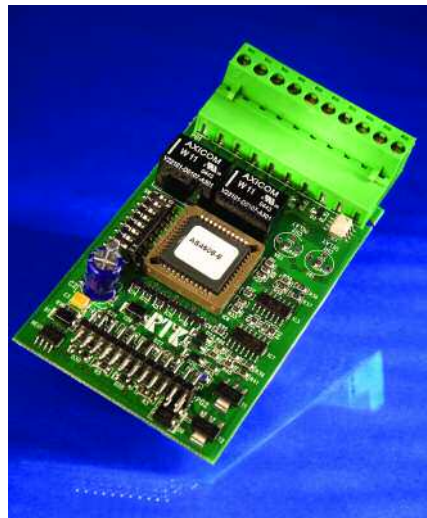

Display

Window Sizes

This flexible unit is designed to be fully modular using a cell based structure.

Each cell can house:

- One large window
2.36" x 2.36" (60 x 60mm)
- Two medium windows
2.36" x 1.18" (60 x 30mm)
- Four small windows
1.18" x 1.18" (30 x 30mm)

Window sizes can be mixed as required.

Backlit Illumination

Each window is backlit by long life incandescent lamps or 'Fit & Forget' removable LED Assemblies. All colors are available for both lamps and LEDs. These colors are red, amber, yellow, white, green and blue.

General

Complete Alarm System

Everything is contained within the standard 725 Annunciator to provide a complete alarm monitoring system. This includes all pushbuttons and a local audible.

First-Up

In alarm annunciation applications it is often essential to know which alarm occurred first in a particular group. To this end, four different first-up sequences and four different first-up groups are available, all user programmable from the front.

Power Supplies

The supply required to power the Annunciator is nominally 24VDC. This can be a simple unregulated low cost source as the annunciator itself will provide all the necessary smoothing and regulation. RTK can supply suitable Power Supplies or DC/DC Converters if converting from higher AC or DC voltages including the RT-AD Dual Redundant Supplies.

CE Marked

Designed within the stringent requirements of the European EMC and LVD directives ensures that the Annunciator conforms to the highest standards of both safety and function.

Wall, Panel and Rack Mounting

The standard unit is supplied as a panel mounting version ready for customers to drop into a single cut-out.

If required RTK can supply the 725 Annunciator fully integrated into wall mounting or floor standing enclosures or mounting within standard 19" plates.

Custom Solutions

Annunciator Options

Illumination (Option LED)

The use of LEDs is becoming more popular and these can be supplied as an optional extra. The 10mm glass wedge bulb is replaced with a small ultra-bright LED Assembly which plugs into the same lampholder as the bulb.

Tropicalized (Option TRO)

In harsh environmental conditions where there may be moisture or chemicals within the atmosphere, there is an option to tropicalize the unit. This consists of covering all the pcbs with a conformal coating and using sealed relays.

Repeat Relays (Option RLY)

The five common relays are always fitted as standard but there is an option of having individual repeat relays for all alarm channels.

Customer Specified Response Time (Option CRT)

As standard the alarm will be activated by signals over 22ms in duration. If this time is either too long or too short to suit the particular application there is an option to increase or decrease this response time.

Disable Horn (Option DHN)

If the integral horn is not required when the audible relays are being used, this can be disabled.

Field Contact Voltage (Option FC**)

The standard unit uses either volt-free contacts or 24V signals to trigger alarms. It is possible to change the field contact voltage to alternatives such as 48V, 125V or 250V. All versions are capable of accepting AC or DC voltages.

Rack Mounting

The Annunciators can be supplied pre-mounted in standard 19" aluminium mounting plates. A maximum of 7 cells will fit across a 19" front plate.

RS485 Serial Communications (Option COM)

All Series 725 Annunciators can be fitted with the optional serial communications card, which is usually located in the cell directly above the pushbutton module. This card provides RS485 bi-directional communication to and from third party devices using modbus ASCII or modbus RTU protocols as standard. All pushbutton controls can be local to the annunciator or driven remotely via the communications link. Up to 64 annunciators can be multi-dropped on the same communications connection.

Adjustable Response Time (Option AD*)

If specified at the time of ordering each channel can be supplied with user adjustment of the response time across any range up to 2 seconds.

Three Horn Relay Outputs (Option 3HN)

It is possible to change the operation of the common relays to have three horn relays and a single group relay rather than two of each. With this option the method of programming of the relays remains the same but their operation is altered slightly.

Three Group Relay Outputs (Option 3GP)

It is possible to change the operation of the common relays to have three group relays and a single horn relay rather than two of each. With this option the method of programming of the relays remains the same but their operation is altered slightly.

Systems and Specials

Systems

RTK Instruments has extensive systems experience and can supply an alarm annunciator as part of a complete alarm system. This may include installing in wall mounting or floor standing enclosures, integrating into mimic displays or wiring together with other switchgear, power supplies or battery backup systems.

Because of the varied nature of this type of special system, they are priced on application against an agreed specification.


Greater Ingress Protection

The Series 725 facia is rated at IP41. Optional hinged plexiglass covers are available in all sizes for IP54 applications. For extreme environmental conditions enclosures with viewing windows are available to meet IP66 and IP67 standards.

Lamp-only Module

Matching Display

To complement our Series 725 Annunciator the 725LO lamp-only unit is available, which provides the same flexibility of display size, window colors and illumination by lamp or removable LED assemblies. The display can be supplied complete with lamp test facilities or with integral audible and pushbuttons if required. With lamp-only versions the lamps or LEDs are simply wired to customer terminals for connection to remote devices as required. See separate datasheet for full details.

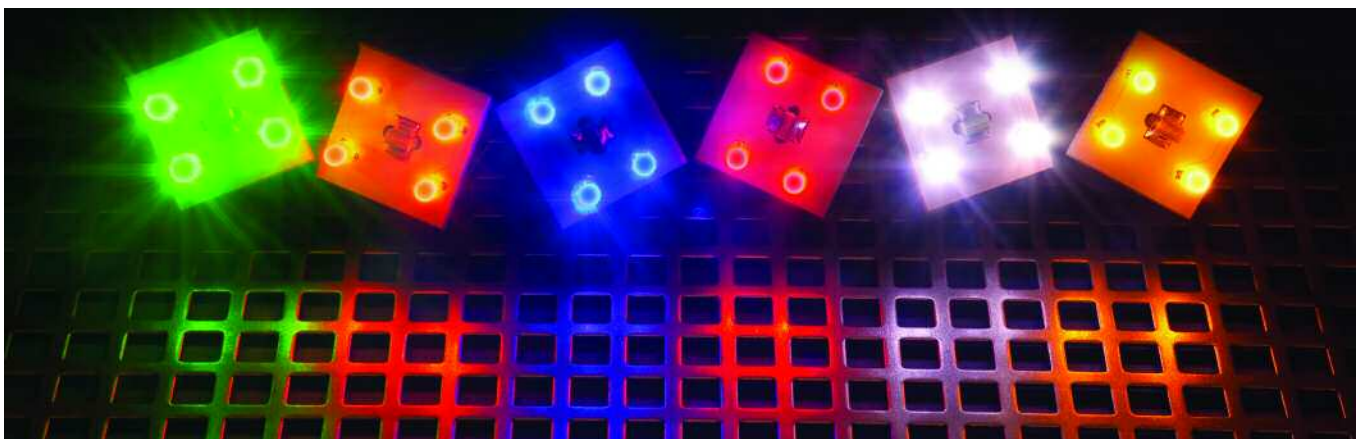


Alarm Sequences

Each alarm channel can be configured to suit the operating sequence required as listed in the ISA publication *Annunciator*


Sequences and Specifications S18.1 1979 (R1985). Systems can be configured with different features on

different alarm channels. The diagram below shows the most commonly used sequences.


MANUAL RESET Sequence Code M

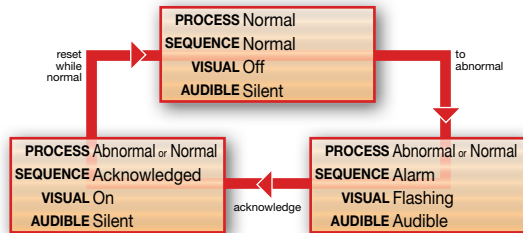


AUTOMATIC RESET Sequence Code A

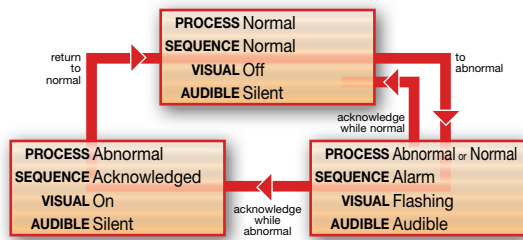


NO LOCK IN

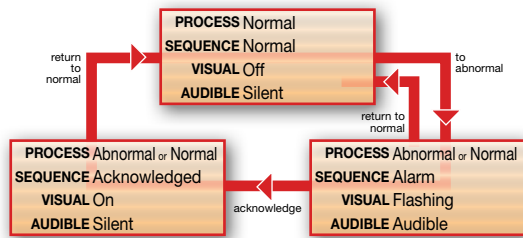


RINGBACK Sequence Code R

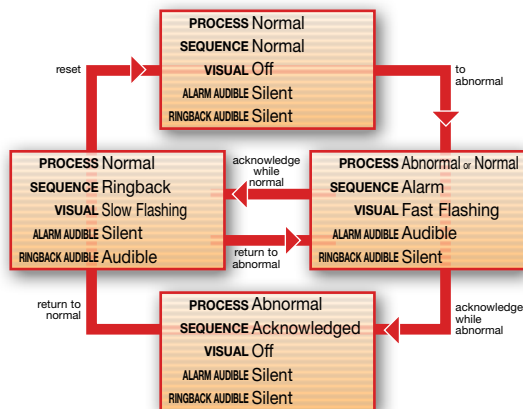


AUTOMATIC RESET FIRST OUT WITH FIRST OUT FLASHING AND RESET PUSHBUTTON Sequence F3A

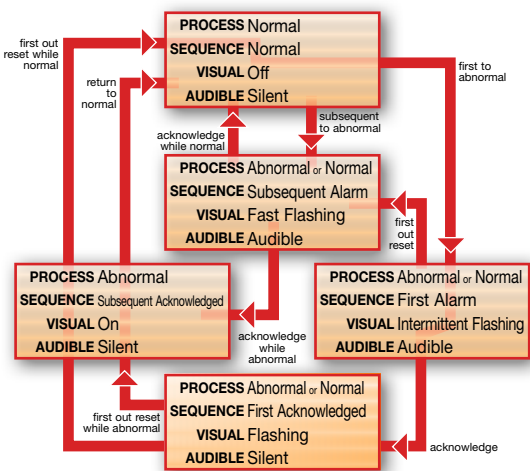

MANUAL RESET FIRST OUT WITH NO SUBSEQUENT ALARM FLASHING AND SILENCE PUSHBUTTON Sequence F2M-1

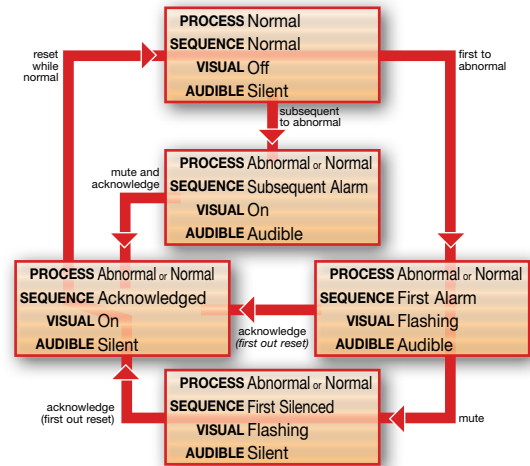

AUTOMATIC RESET FIRST OUT WITH NO SUBSEQUENT ALARM STATE Sequence F1A

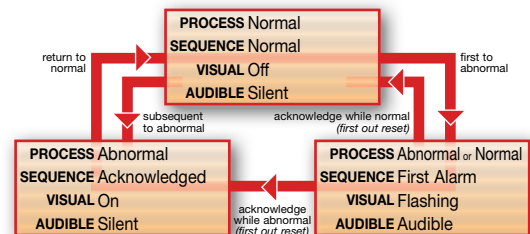




System Configuration

Window Size & Layout

The Series 725 Annunciator is modular in design allowing customers to quickly design each alarm system to suit their

exact requirements for both window size and number of windows. The system is built up of multiple cells; each cell has dimensions of 2.36" x 2.36" (60 x 60mm) and can be configured as a single large window 2.36" x 2.36", (60 x 60mm) two




medium windows 2.36" x 1.18" (60 x 30mm) or four small windows 1.18" x 1.18" (30 x 30mm). The units are built up from pre-tested components so custom solutions can be provided with the best possible lead times.

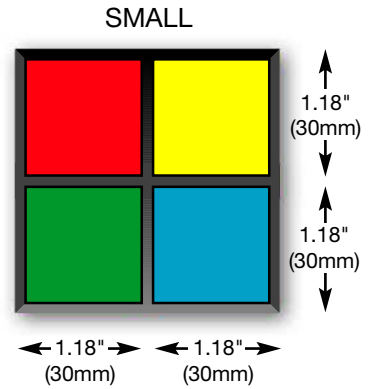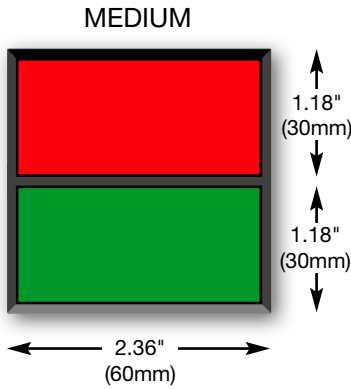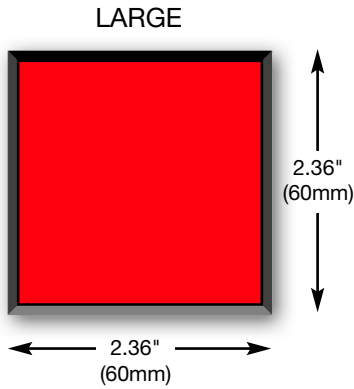

Units can be configured into almost any shape and size as long as the overall width or height is less than 30 cells.

Windows are numbered depending on window size as shown in the examples below. Please refer to these numbers

when providing legend/configuration details

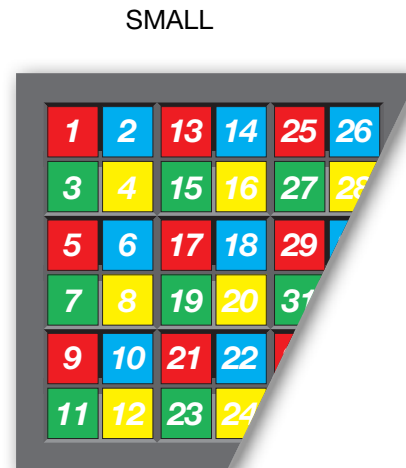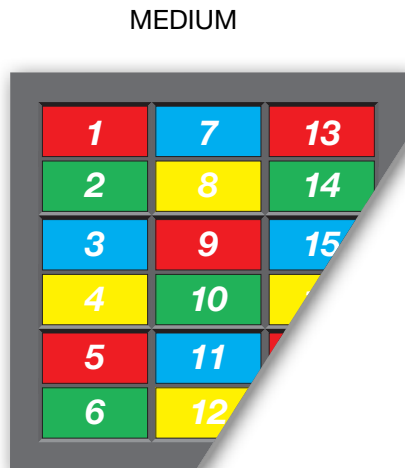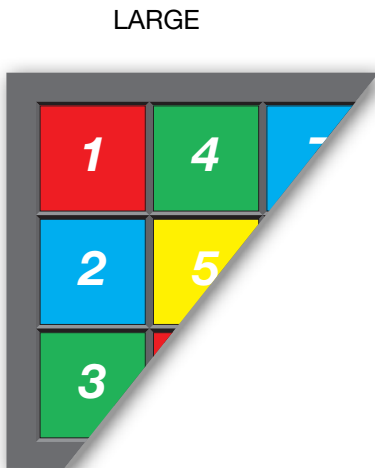

Rear View/Removable Customer Terminals



System Configuration

Dimensions

The dimensions are very simple to work out using the following formula or alternatively read from the table below.

Overall dimensions = [(No of cells) x 2.36" (60mm)]
+ 0.94"mm (24mm)

Cutout dimensions = [(No of cells) x 2.36" (60mm)]
+ 0.55"mm (14mm)


NO OF CELLS	OVERALL	CUTOUT
1	3.31" (84mm)	2.91" (74mm)
2	5.67" (144mm)	5.27" (134mm)
3	8.03" (204mm)	7.69" (194mm)
4	10.39" (264mm)	10.00" (254mm)
5	12.75" (324mm)	12.36" (314mm)
6	15.11" (384mm)	14.72" (374mm)
7	17.48" (444mm)	17.09" (434mm)
8	19.84" (504mm)	19.45" (494mm)
9	22.20" (564mm)	21.81" (554mm)
10	24.56" (624mm)	24.17" (614mm)
11	26.93" (684mm)	26.53" (674mm)
12	29.29" (744mm)	28.90" (734mm)
13	31.65" (804mm)	31.26" (794mm)
14	34.01" (864mm)	33.62" (854mm)
15	34.38" (924mm)	35.98" (914mm)
16	38.74" (984mm)	38.35" (974mm)

Film Legends


As fully approved details of alarm text is often not available at the time of order, acetate film legends are generally used. RTK can supply the Series 725 Annunciator complete with alarm legends or they can be generated by the customer using a Microsoft Excel software template. This allows the user to create their own legends locally. Once the details have been entered they can be printed onto acetate film via a laser printer. This software template makes the production of legends in different languages, sizes and fonts very straightforward.

Bezel Assembly

The diagram below shows how the bezel assembly is constructed using different layers to diffuse the light, color and window and show the text using a film legend insert. These assemblies are simple to move around in the Annunciator frame and to change color or text on site.

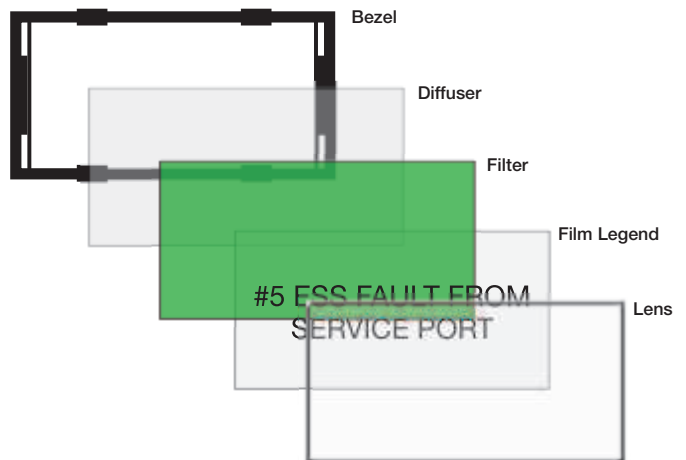

Order Code

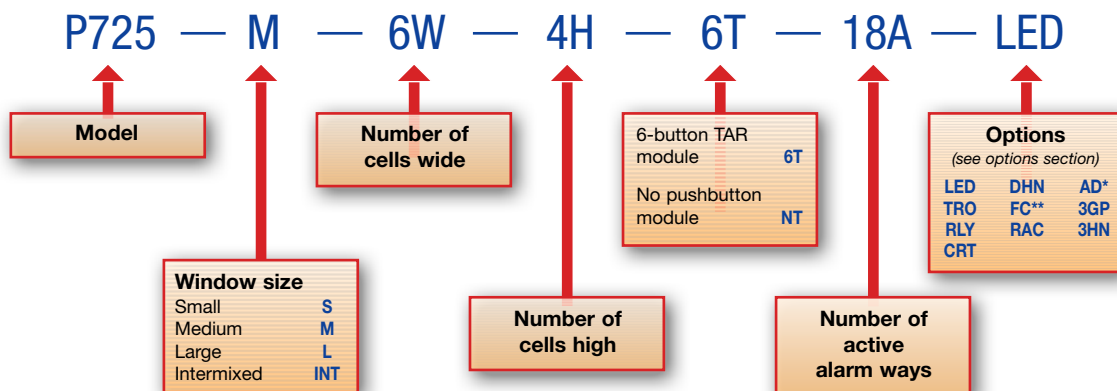

Technical Specification

Inputs

The inputs are all bipolar so can accept AC or DC voltages.

Alarm Contacts

The standard unit is suitable for volt-free contacts or 24VDC powered inputs. Each input can be easily set to operate from either a Normally Open or Normally Closed field contact.

Isolation

All customer inputs are optically coupled as standard and are capable of withstanding 1000V Megger test to ground.

Field Contact Voltage

This voltage is distributed through the annunciator to field contacts, 24VDC is supplied as standard.

Options for 48, 125 and 250V are available. The inputs are all bipolar so can accept AC or DC voltages.

Response Time

- ▶ Standard units 22ms
- ▶ Customer defined fixed response time from 1ms to 2s, specified at time of order
- ▶ Adjustable response time typically 5-50ms (Option AD1)

First-up Discrimination

Better than 5ms

Pushbuttons

Both integral and terminals for remote fitting

- ▶ Lamp Test
- ▶ System Test
- ▶ Acknowledge
- ▶ Mute
- ▶ Reset
- ▶ First-up Reset

Optional remote pushbutton/programming assembly.

Outputs

Common Relays

All systems come with the five common, programmable relays fitted behind the Pushbutton Module.

- 1 Critical Audible
- 2 Non-critical Audible
- 3 Critical Group
- 4 Non-critical Group
- 5 Special Function Relay

Repeat Relays

Each alarm channel can have individual repeat relays. Changeover contact available. Relay contacts rated at 220VDC (250VAC) max, 125VDC @ 0.5A, 24VDC @ 2A, resistive. Two relays per channel can be provided (Option RL2).

Audible

3kHz piezoelectric buzzer at 90dB 30cm.

Communications (Optional)

RS485 2 or 4 wire, Modbus, ASCII or Modbus RTU protocol user selectable. Master and Slave configurations. Supports bi-directional communications Ethernet Modbus TCP/IP. Alarm Management software. Other protocols available on request.

Display

Window Sizes

Small: 1.18" x 1.18" (30 x 30mm)
Medium: 2.36" x 1.18" (60 x 30mm) (W x H)
Large: 2.36" x 2.36" (60 x 60mm)

Window Colors

Red, Amber, Yellow, White, Green and Blue for both Lamp and LED Illumination.

Illumination

Small window Single Bulb/LED
Medium window Dual Bulb/dual LED
Large window Four Bulb/four LEDs

The LEDs are ultra-bright LED Assemblies that plug into the standard 0.39" (10mm) wedge style lampholder.

Lamps

28V 50mA 0.39" (10mm) glass wedge. 14,000 hour design life.

LED Assemblies

10mm base 'Fit and Forget' plug-in LED Assemblies, typically 20mA, minimum 11-year life expectancy.

General

Supply Voltage

24VDC Nominal (19-28VDC)

Supply Current Per Alarm Point (at 24VDC supply)

Quiescent:		9mA
Lamps:	Small window	45mA
	Medium window	90mA
	Large window	180mA
LEDs:	Small window	20mA
	Medium window	40mA
	Large window	80mA

Relays: All window sizes 10mA per relay

Additional current for pushbutton module, common relay and audible is nominally 100mA.

Standard Power Supplies and DC/DC Converters can be supplied on request.

Compliance

Immunity to EN61000-6-2:2001
Emissions to EN61000-6-4:2001
LVD to EN61010-1:1993

Surge Immunity

To AMSI/IEEE C37.90:1989

Environment

Operating temperature (lamp version)
-4 to 122°F (-20 to 50°C)
Operating temperature (LED version)
-4 to 140°F (-20 to 60°C)
Storage temperature
-4 to 176°F (-20 to 80°C)
Humidity 0-95% RH, non condensing

Protection

Front of panel: IP41
Rear of enclosure: IP20
Optional covers and enclosures to protect from IP54 up to IP67

Connections

Two-part rising clamp type terminals, for conductors up to 12 AWG (2.5mm²) wire.

Weight

Approximately 0.7lbs (0.3kg) per module.

Due to our policy of continuous product development, we reserve the right to amend specifications without notice.



RTK Instruments
1531 Stuyvesant Avenue
Union
New Jersey 07083
USA

Telephone: 908 688 6709
Facsimile: 908 688 9040
Email: sales@rtkinstruments.com
Web: www.rtkinstruments.com