



LPF PSignature Series Ultrasonic Flowmeter

PSignature Series

LPF Low Pressure Flare
Ultrasonic Flowmeter

Applications


- Flare Gas
- Vent Gas
- Bio Gas
- Fuel Gas
- Process Gases

Features

- Measures velocity, volumetric and mass flow
- Molecular weight calculations
- Suitable for varying gas composition
- High turndown ratio
- Low cost and custom design options


Why purchase flowmeters from Procon?

- Flowmeters completely assembled, tested, inspected and shipped ready for installation.
- Optional “on-line” transducer insertion and removal
- All quotes include calculations with accuracy and specific drawings.
- Meets all applicable North American codes and standards (Details specified on quotes and drawings)
- In-house low pressure flow calibration loop, used for verification, improved accuracy, reduced straight run and new design testing.
- Combines tested, proven and new technologies with engineering and experience to provide the best solutions for our valued customers.
- More than 25 Years of flare meter application and service. Factory trained service technicians and stocked parts to minimize downtime.

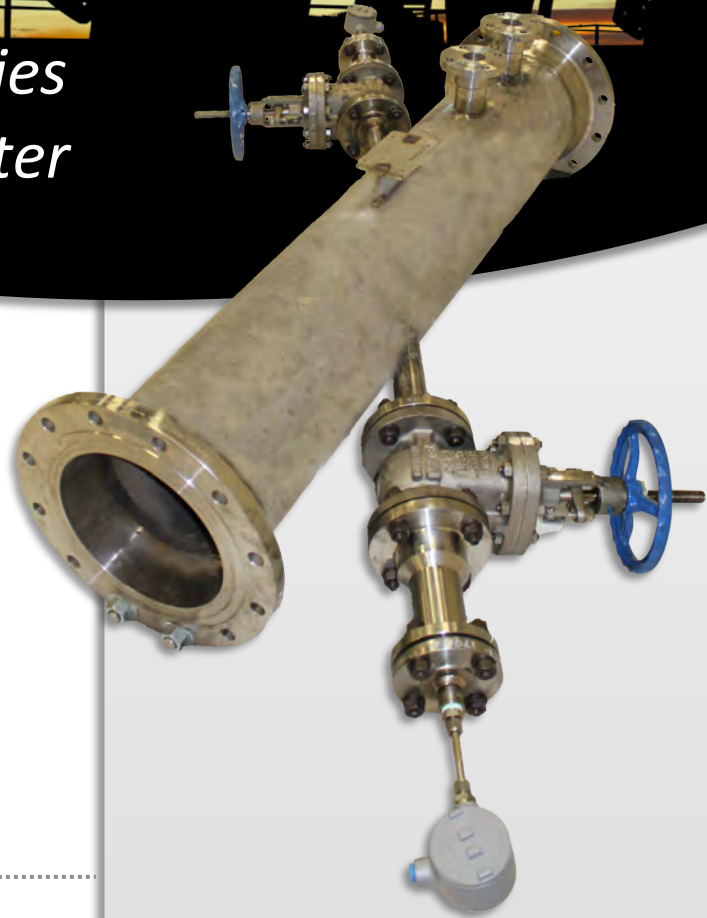

PROCON
SYSTEMS

Procon has designed, assembled and tested ultrasonic flowmeters for over 20 years with thousands of installations. All our flowmeters are engineered to meet specific application and customer requirements at very competitive prices

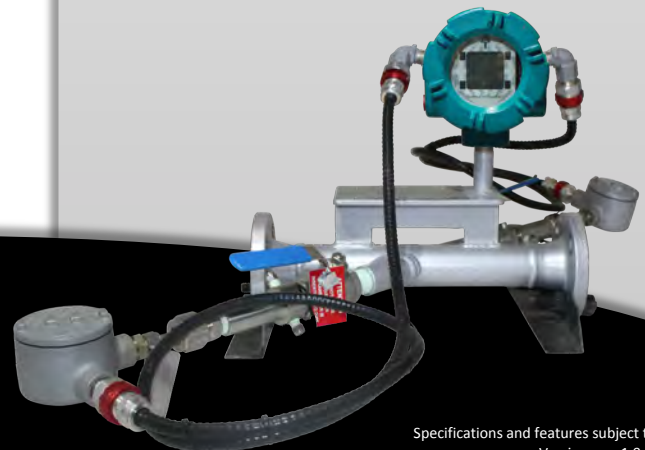

CANADA

USA

Toll Free 1-866-255-2921

Toll Free 1-866-455-2921

Specifications and features subject to change
Version no.: 1.0 Nov. 2012

LPF PSignature Series Ultrasonic Flowmeter



General Specifications:

For additional technical details see ordering information.

Flowcell

Flow/Accuracy:	Typical $\pm 2.0\%$ of velocity reading 0.3m/s to 50 m/s Typical $\pm 5.0\%$ of velocity reading 0.3m/s to 120 m/s Flow calculations with Accuracy Statements provided for each application Typical Accuracies based on 6" or larger lines with adequate Straight Run, typically 20D Upstream / 10D Downstream for gas applications
Repeatability:	$\pm 0.5\%$ of Reading
Size:	1 – 96 inches
Rating:	ASME CLASS 150 – 600
CSA:	Class 1, Div.1, Groups C & D, (Group B option available)
Design Temperature:	-364°F to 482°F (-220°C to 250°C) 800°F option available, see options for details
Ambient Temperature:	-50°F to 140°F (-45°C to 60°C)

Electronics

Enclosure:	CSA and FM approved for Class 1, Div. 2, Group A, B, C & D areas – Enclosure epoxy coated aluminum, NEMA 4X
Display:	Two independent software configurable (64 x 128 pixel) backlit LCD graphic displays
Ambient Temperature:	-4°F to 131°F (-20°C to 55°C), LCD display will blank out at -10°C
Storage Temperature:	-67°F to 167°F (-55°C to 75°C)
Weight & Dimensions:	14.24 in x 11.4 in x 5.12 in (362 mm x 290 mm x 130 mm) 11 lbs (5 kg)
Power Supply:	20W maximum, 100-240 VAC (Standard), 12-28 VDC (Optional)
Inputs/Outputs:	Standard six 4-20mA Isolated Outputs, two with 500 Ω maximum load, four with 1000 Ω max load, two 0/4-20mA Inputs. Additional I/O available

Documentation (Standard with all Flowmeters):

Drawings, Flow Calculations, Manuals, Certificate of Compliance, Welding Procedures and Qualifications, Hydrotest, NDE Reports, Material Test Reports, CSA, Programming Sheet, ITP, PWF, Optional flow calibration



PROCON
SYSTEMS

CANADA

Toll Free 1-866-255-2921

USA

Toll Free 1-866-455-2922

LPF PSignature Series Ultrasonic Flowmeter

Ordering Information

LPF - A - B - C - D - E - F - G - H - I - J - K - L - M - N

Example: LPF-06-150-RF-LC-1-I-2-100-N-1-0-4-CRN-NAC-F001000

Option Code	Description
A	Nominal Size
01..96	Nominal Size in Inches
B	Rating
---	No Rating (Typical for Weld Prep Flowmeters)
150	
300	
600	
C	End Connections
RF	Raised Face Flange
FF	Flat Face Flange
WP	Weld Prep
D	Material of Construction
CS	Carbon Steel
LC	Low Temp Carbon Steel
34	304 Stainless Steel
36	316 Stainless Steel
E	# Of Paths
1	Single Path
2	Dual Path
F	Transducer Ports
T	Threaded
W	Socket Weld
F	Flanged
C	Threaded Insertion Mechanism
I	Flanged Insertion Mechanism
G	Extra Ports on Flowcell body
0..9	Number of additional ports (Port Details to be shown on Drawing)
H	Max Flow
XXX	XX m/s Custom Max Flow Velocity in m/s (Gas Composition required to confirm Max. Range)
010	Max Flow Velocity in m/s (Gas Composition required to confirm Max. Range)
050	Max Flow Velocity in m/s (Gas Composition required to confirm Max. Range)
100	Max Flow Velocity in m/s (Gas Composition required to confirm Max. Range)
120	Max Flow Velocity in m/s (Gas Composition required to confirm Max. Range)
I	Operating Temperature Range
N	-67°F to 302°F (-55°C to +150°C)
L	-364°F to +212°F (-220°C to +100°C)
H	-58°F to +482°F (-50°C to +250°C)
E	-58°F to +850°F (-50°C to +426.7°C) Transducers will be damaged over +250°C but there is no risk of leakage

J	Power
1	100 to 120 VAC operating voltage
2	220 to 240 VAC operating voltage
3	12 to 28 VAC operating voltage
K	Alarms
0	None
1	Three hermetically sealed alarm relays scalable for high flow, low flow and fault conditions
2	Six hermetically sealed alarm relays scalable for high flow, low flow and fault conditions
L	Logging / Digital Communications
0	None
1	Four software configurable pulse total or frequency outputs
4	ModBus digital output only
5	ModBus digital output and four software configurable pulse total or frequency outputs
A	HART communication only
B	HART communication and four software configurable pulse total or frequency outputs
8	MODBUS TCP for communication over Ethernet
9	Ethernet card. Allows PanaView or OPC Server to communication with meter over the Ethernet
F	Foundation Fieldbus
M	Optional Extras and Specials (Can be more than one)
CRN	Canadian Registration Number (Specify Province or Provinces)
NAC	NACE Certificate of Compliance
CSB	CSA Group B (H2) Approval for Flowcell Transducers
PMI	Positive Material Identification
HAR	Hardness Testing of Production Welds
PWH	Post Weld Heat Treatment
YEL	Yellow Flow Arrows Painted on each side of the Flowcell
JET	Jet Lube Petro Tape only
ICO	Internal Coating (Specify Details)
SSS	Special (Specify)
N	Drawing #
F00XXXX	Flowmeter Drawing #



Procon Systems (2013) Inc.

Calgary, AB CANADA
9504 Horton Road SW
Calgary, AB T2V 2X4
Toll Free: 1-866-255-2921
Phone: 403-255-2921
Fax: 403-255-3928

Procon Systems (2013) Inc.

Edmonton, AB CANADA
6025 – 99th Street NW
Edmonton, AB T6E 3P1
Toll free: 1-877-844-6665
Phone: 780-437-0244
Fax: 780-438-2893

Procon Systems (2013) Inc.

**Delta, BC V4K-4B7
CANADA**
Toll free: 1-866-455-2921
Phone: 604-940-8757
Fax: 604-940-9126

Procon Systems (2013) Inc.

**Regina, SK S4P-0J3
CANADA**
Toll-free: 1-866-455-2921
Phone: 306-206-2727

Procon Technologies Inc.

Naperville, IL USA
530 Industrial Drive
Naperville, IL 60563
Toll-free: 1-866-455-2921
Phone: 630-357-8540
Fax: 630-357-4918

Procon Technologies Inc.

**Hightstown, NJ 08520
USA**
Toll-free: 1-866-455-2921
Phone: 609-819-7070
Fax: 630-357-4918

**Procon Measurements
and Controls Inc.**

**Cambridge, ON N1R-4T5
CANADA**
Toll-free: 1-866-455-2921
Phone: 519-267-3121
Fax: 519-267-3127



www.proconsystems.com